

eukula®



FREE



**Because we always give 100 %.**

Discover our completely solvent-free lacquer and oil systems for wood and cork floors.



Clean air  
Since we exist.


The eukula brand was born in the Black Forest and has been focusing on protecting health and the environment for 60 years.

WOOD.FLOOR.LOVE – made with  in Germany



100 % solvent-free

Good for wood floors.  
Good for people and the environment.



The system with  - for all areas of application

- ✓ environmentally friendly
- ✓ low emission
- ✓ fast drying
- ✓ odourless
- ✓ healthier
- ✓ flexibly combinable

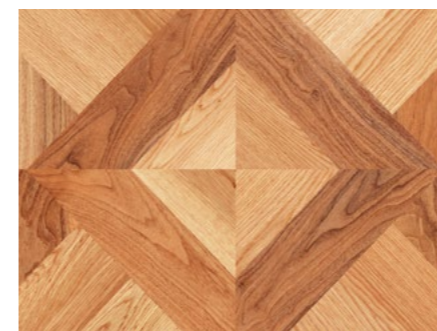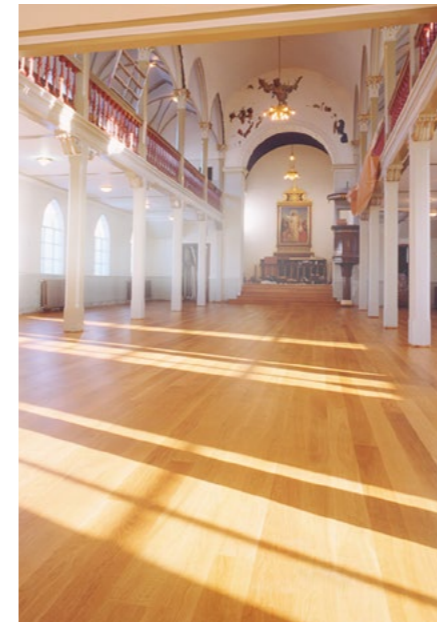

„Our sustainable oil and lacquer systems completely avoid the use of solvents and thus offer a natural solution for the design and durable protection of wooden floors.“

Dr. Lothar Schutz, Managing Director



In sensitive areas such as daycares or schools, natural products are indispensable.




### eukula fill 101

Water-based wood filler binder

For the production of joint filler from sanding dust. Fast drying, good filling power, no darkening under oil, easy to apply.

 solvent-free

 good filling power

 fast drying

 good sanding properties




### eukula classic prime 200

Water-based roller primer


Water-based roller primer for wood and cork floors. Warm colouring, strong blocking effect, reduces edge bonding. Suitable for underfloor heating.

 solvent-free

 quick-drying

 strong blocking effect

 easy to use

 environmentally friendly




### eukula exotic prime 201

Water-based roller primer especially recommended for tropical woods.


Water-based roller primer for wood and cork floors suitable for all common woods. Especially recommended for priming tropical woods. Strong barrier effect, reduces edge bonding. Suitable for underfloor heating.


 solvent-free

 for exotic woods

 strong blocking effect

 easy to use

 environmentally friendly

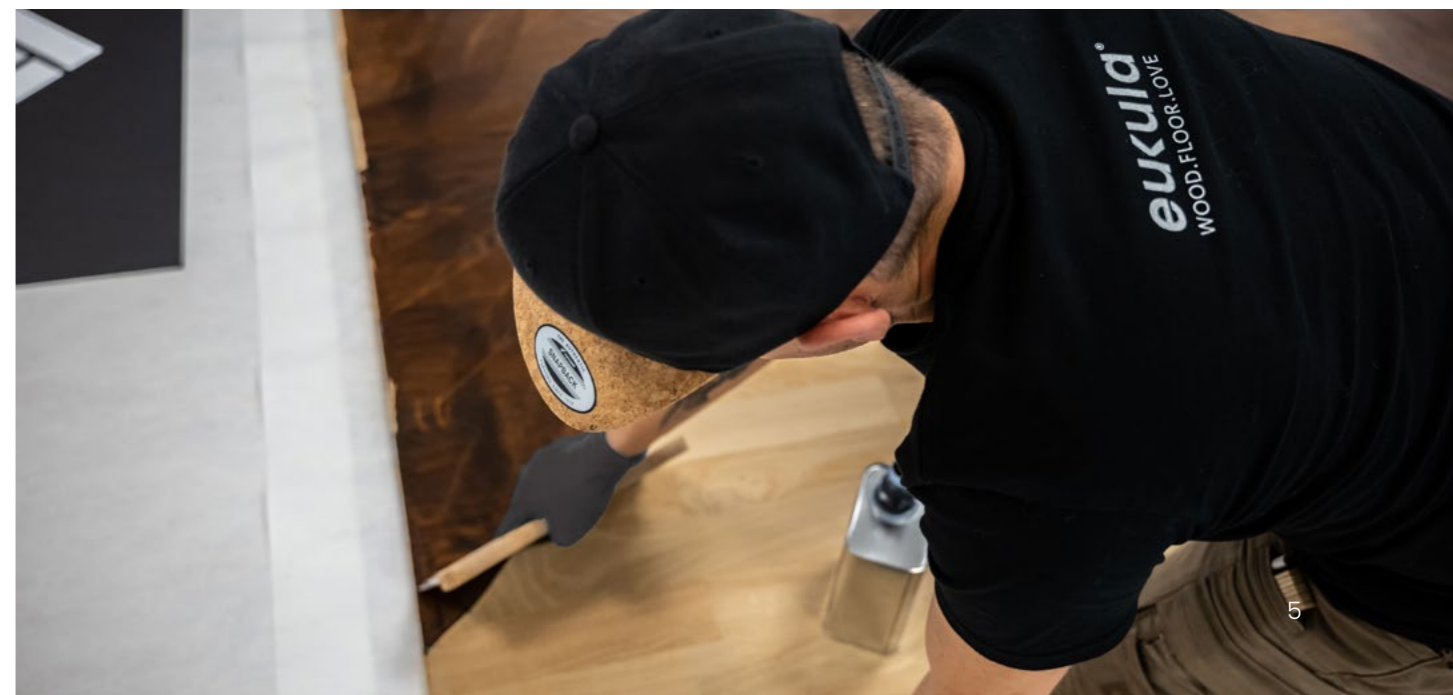



### eukula premium 37x


1-part water-based lacquer for wood and cork floors exposed to heavy wear and tear.

This strong, water-based polyurethane lacquer guarantees high abrasion resistance, ease of sanding, as well as the highest level of safety in residential and commercial areas.

 solvent-free

 suitable for toys

 saliva-proof

 easy application




**A world first!**

### eukula free 442

2-part water-based lacquer for wood and cork floors

The world's one and only solvent and isocyanate-free 2-part lacquer combines sustainability and technical innovation. Whether as a pure lacquer structure, or in a solvent-free oil-lacquer system, with eukula free 442 you have maximum flexibility, combined with the best indoor air quality and durability.


 solvent & isocyanate free

 unique technology

 easy application

 suitable for toys

 saliva-proof

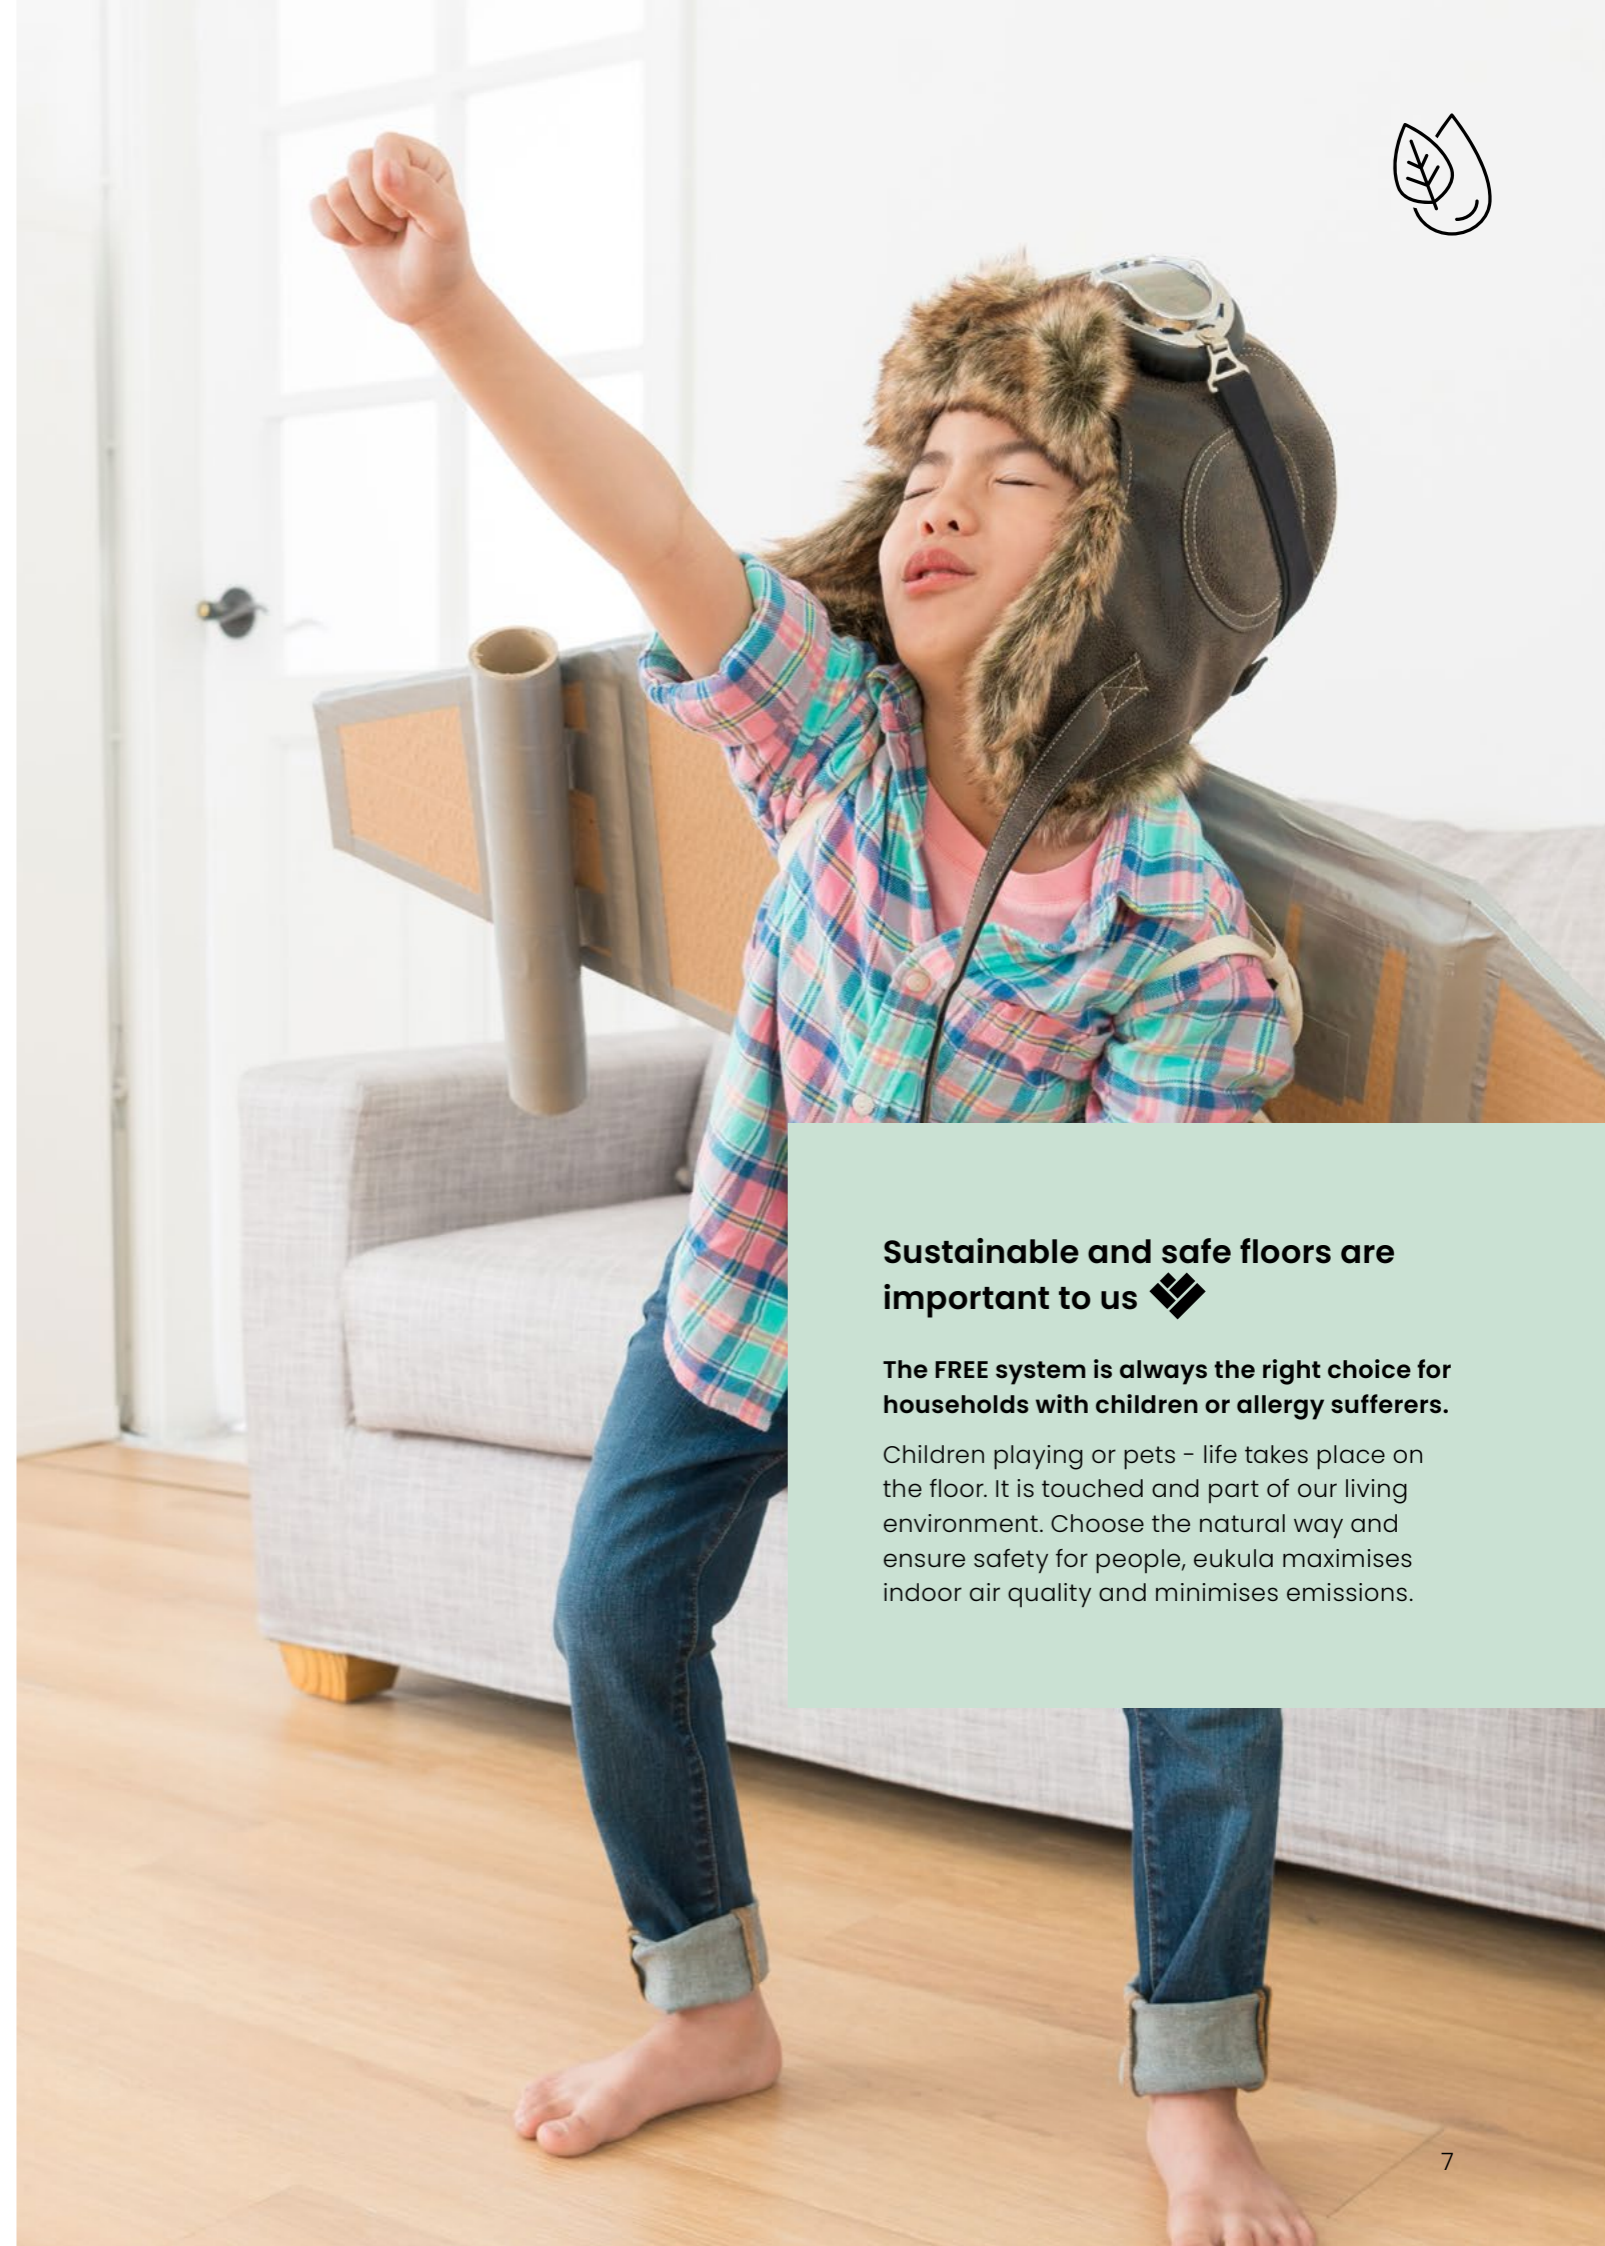

**Sustainable and safe floors are important to us** 

**The FREE system is always the right choice for households with children or allergy sufferers.**

Children playing or pets - life takes place on the floor. It is touched and part of our living environment. Choose the natural way and ensure safety for people, eukula maximises indoor air quality and minimises emissions.



### eukula oil 1 FS

Natural oil-based deep impregnation for wood and cork floors

This full-solid oil with a natural, open-pored character can be used on all sanded floors in residential and commercial areas, on all European and North American types of wood, as well as cork and many exotic woods.

**Tip:** Both 1-part and 2-part applications are possible. Suitable for the treatment of children's toys according to EN 71-3

- solvent-free
- long open time
- does not form layers
- suitable for toys
- can be lacquered over



### eukula oil 2+ FS

Oil-wax combination for deep impregnation of wood and cork floors.

Enables oiling and waxing in one step. Based on natural oils as well as beeswax and carnauba wax.

- solvent-free
- long open time
- does not form layers
- suitable for toys



### eukula master FS

Reactive finish

eukula oil 1 FS, eukula oil 2+ FS, eukula color oil FS as well as eukula hardwax oil+ can be used in combination with the eukula master FS to form 2-part oils of the highest quality, thus providing improved oil hardening properties and surface resistance.

- solvent-free
- increased resistance
- 2nd component for all eukula oils
- environmentally friendly



### eukula color oil FS

Pigmented natural oil-based deep impregnation for wood and cork floors


For even more creative designs, the 12 standard colours, as well as eukula oil 1 FS, can be combined with each other to create a colour of your choice.

**NEW:** 40 more colours are available on demand.

Snow | Pine | Cherry | Red | Coffee/ Hazel | Mahogany | Ebony | Light grey | Black | Green | Blue

**Tip:** Both 1-part or 2-part applications are possible. Easy mixing of colours.

- solvent-free
- long open time
- can be lacquered over

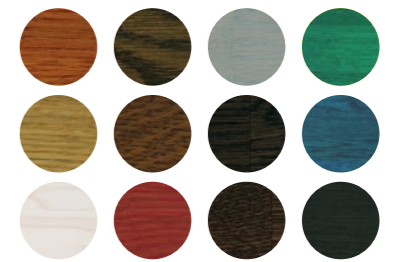

### eukula conditioners – for a perfect pre-treatment



#### eukula classic lye conditioner

Water-based special lye for softwoods and hardwoods

For the classic Scandinavian pre-treatment of softwoods before oiling. Strong honey tone. For hardwoods (such as oak) warm, amber colouring.



#### eukula oak antique conditioner

Water-based special lye for hardwoods

Pre-treatment before oiling to achieve an antique effect. Intensifies the colour appearance of oak.



#### eukula oak iron conditioner

Water-based special lye with smoked effect for hardwoods

Pre-treatment before oiling for blackening the tannins, especially in oak wood. Colour effect similar to smoked oak.

- solvent-free
- 2 in 1 – moistening and colour enhancing

# 100% solvent-free finish



H <sub>2</sub> O		OIL			
Solvent-free Pure air		Oil Open purist	Oil-wax combination Bee lover	Colour oil Play of colours	Color oil wax finish Coloured with topping
1.	<p>Prepare/sand surfaces according to the state of the art and the rules of the trade.</p> <p>Grout with <b>fill 101 - grouting solution</b>. It is important that the sanding pattern is as free of sanding marks as possible.</p>	<p>1. Prepare/sand surfaces according to the state of the art and the rules of the trade. Grout with <b>fill 101 - grouting solution</b>. It is important that the sanding pattern is as free of sanding marks as possible.</p>			
2a.	<p><b>classic prime 200</b> 130 ml/m<sup>2</sup> 2 hours drying time</p>	<p>2. Moisten the sanded floor (25-50 ml/m<sup>2</sup> pure water). Spray on/wipe up - surface must be fully wetted once - wait for complete visible drying.</p>			
3a.	<p><b>premium 37x</b> 100 - 120 ml/m<sup>2</sup> 4 - 6 hours until intermediate sanding</p>	<p>2a. <b>ALTERNATIVELY</b>, the eukula conditioners can also be used for step 2 to create a special coloured effect. Wipe on - 16 hours drying time - build up with the desired impregnation system.</p>			
4a.	<p>Grit 120 - 150</p>	<p>With the following treatment methods floors are protected for medium- to heavy-traffic areas.</p>			
5a.	<p><b>premium 37x</b> 100 - 120 ml/m<sup>2</sup> 4 - 6 hours until walkable</p>	<p>3. <b>oil 1 FS</b> ~ 50 ml/m<sup>2</sup> (until saturation) 18 - 24 hours</p>	<p><b>oil 2+ FS</b> ~ 50 ml/m<sup>2</sup> (until saturation) 18 - 24 hours</p>	<p><b>color oil FS</b> ~ 50 ml/m<sup>2</sup> 18 - 24 hours</p>	<p><b>color oil FS</b> ~ 50 ml/m<sup>2</sup> 18 - 24 hours</p>
		<p>4. Completely buff off/polish out excess with Normal Pad white or beige.</p>			
		<p>5. <b>oil 1 FS</b> ~ 25 ml/m<sup>2</sup> 18 - 24 hours until usable</p>	<p><b>oil 2+ FS</b> ~ 25 ml/m<sup>2</sup> 18 - 24 hours until usable</p>	<p><b>oil 1 FS</b> ~ 25 ml/m<sup>2</sup> 18 - 24 hours until usable</p>	<p><b>oil 2+ FS</b> ~ 25 ml/m<sup>2</sup> 18 - 24 hours until usable</p>
		<p>6. Completely buff off/polish out excess with Normal Pad white or beige.</p>			
2b.	<p><b>classic prime 200</b> 130 ml/m<sup>2</sup> 2 hours drying time</p>	<p><b>open-pored, natural and plant-based pure oil impregnation</b></p>	<p><b>open-pored, natural plant-based oil-wax combination with bee and carnauba waxes</b></p>	<p><b>coloured, open-pored, natural and plant-based pure oil impregnation</b></p>	<p><b>coloured, open-pored, natural and plant-based pure oil impregnation with wax finish</b></p>
3b.	<p><b>free 442</b> 100 - 120 ml/m<sup>2</sup> 4 - 6 hours until intermediate sanding</p>	<p>To achieve maximum durability, add <b>master FS</b> to the oil systems in a mixing ratio of 10:1</p>			
4b.	<p>Grit 120 - 150</p>				
5b.	<p><b>free 442</b> 100 - 120 ml/m<sup>2</sup> 4 - 6 hours until walkable</p>				
	<p><b>Solvent- and iso-cyanate-free structure from filler to lacquer</b></p>				

More detailed information can be found on eukula.com in our current product information and our technical information sheets.

\*Load capacity (☺ light, ☺ medium, ☺ strong/very strong, ☺ extremely strong)  
  solvent-free product

Reduce your emissions,  
not your demands!

Not visible, but noticeably better:  
for the floors of tomorrow.

With our professional system for the highest customer demands, you can be as flexible as possible with all your finishing requirements and make no compromises in terms of health and environmental protection. Just as easy to apply, just as resilient, just as visually perfect - only **FREE**.

DISCOVER

**WOOD.  
FLOOR.  
LOVE.**



## Clean air

Our solvent-free systems set an example, not only for a healthy environment, but also for the health of our customers. Whether transparent, colour enhancing, pure lacquer, oil-lacquer combination or coloured – A solvent-free finish is possible in all variations with eukula.

Together with PLANT-MY-TREE® we are helping to reforest many areas around Europe: For every solvent-free product purchased, we donate a tree in the Harz Mountains and sponsor it for 99 years.

Find out more under [eukula.com/en/plantmytree](https://eukula.com/en/plantmytree)

